



eARC/ARC to analog Audio Converter

Model: DA25



INTRODUCTION

Thank you for purchasing from OREI. Our products aim to meet all your connectivity needs wherever you go. To ensure proper use of this product, please read this instruction manual carefully and retain for future reference.

The DA25 is an HDMI audio converter that converts eARC/ ARC audio signals to analog audio signals. It has one HDMI input and two analog audio outputs, one RCA RL and one 3.5mm AUX. This converter supports stereo PCM and has an LED indicator light.

FEATURES AND CONTENTS


Features:

- Converts the HDMI (eARC& ARC) digital signals from the TV into 3.5mm AUX and L/R analog audio signals
- Input: HDMI ARC
- Output: R / L 2 RCA or 3.5mm connector (output audio simultaneously)
- Supports stereo PCM / LPCM 2.0 Channel 192KHz / 24 bits max support (depend on max audio resolution of the source)
- Power on/off Switch
- LED indicator
- Plug & play

Package Contents:

- 1 x DA25 main unit
- 1 x RCA to RCA cable
- 1 x AC/DC adaptor
- User Manual

INTERFACE

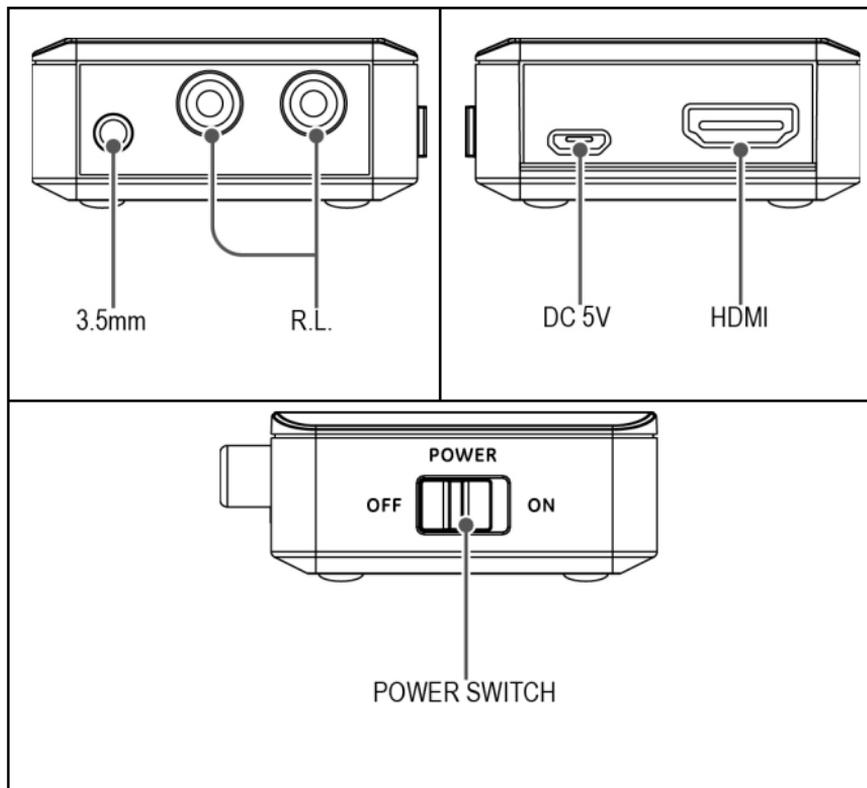

INSTALLATION

Before you start with your installation, we recommend you turn all the audio and video devices off to avoid the popping unwanted noise.

When all the connections are fixed, then you can turn on the power of all the related equipments.

RL Connection

The DA25 with Audio RL and 3.5mm Stereo output at the same time. You can choose RL audio in the following connection.

Step 1. Connect one RCA cable to the "RL OUT" output from the converter, and the other end to the RCA input of your audio equipment.

Step 2. Take a HDMI cable and connect to the ARC/eARC HDMI Port of your TV (Please refer to the manual of your TV set).

Step 3. Connect the AC/DC adaptor to the DA25 audio converter.


Step 4. Go to the TV audio settings to output the audio from the ARC port.

Make sure that the output format is PCM 2 CH.

(Refer to your TV's user manual for this if necessary).

Step 5. Turn on the power of connected device.

Connect to eARC/ARC HDMI port of TV

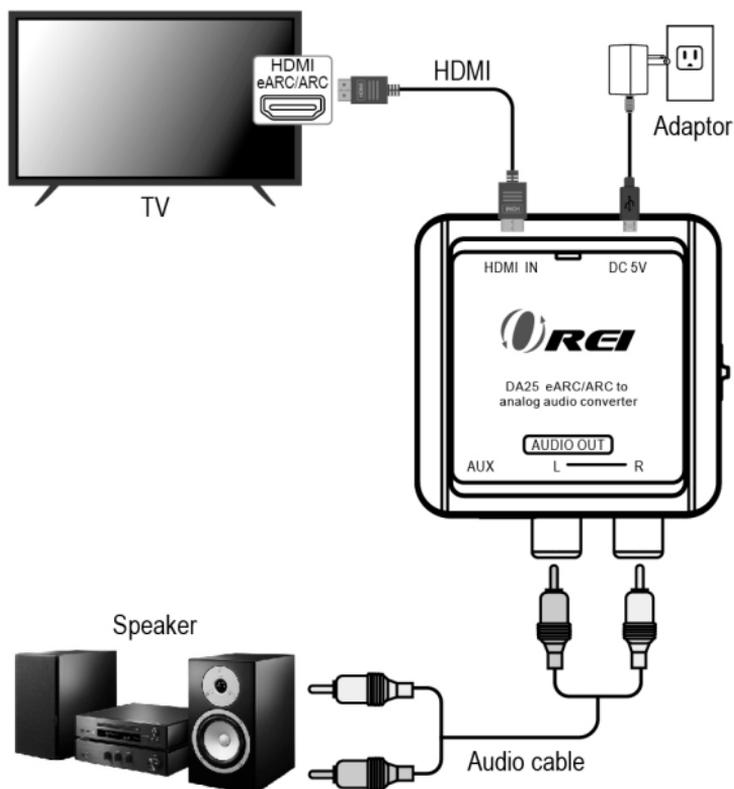

3.5mm Stereo Connection

The DA25 with Audio RL and 3.5mm Stereo output at the same time, you can choose RL audio in the following connection.

Step 1. Connect one 3.5mm AUX cable to the "AUX OUT" output from the converter, and the other end to the 3.5mm audio input of your audio device.


Step 2. Take an HDMI cable and connect it to the ARC/eARC HDMI

port of your TV.

Step 3. Connect the power adapter to the DA25 audio converter.

Step 4. Go to the TV audio settings to output the audio from the ARC port. Make sure that the output format is PCM 2 CH. (Refer to your TV's user manual for this if necessary).

Step 5. Turn on the power of connected device.

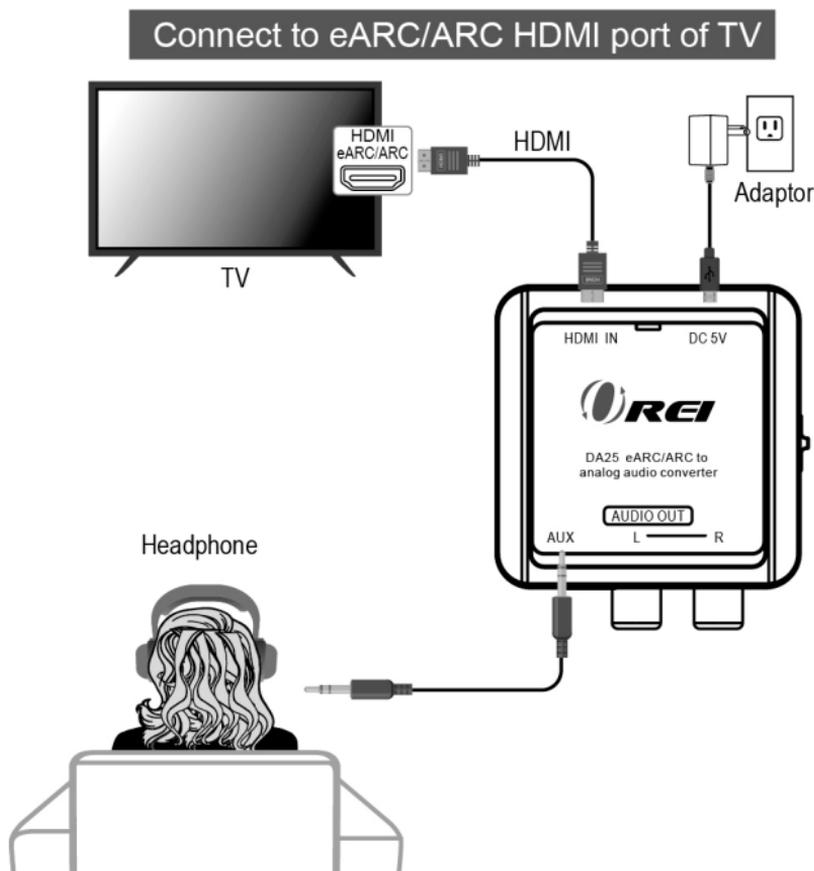

TROUBLE SHOOTING

Problem: No audio output by audio system

Solution:

Make sure your audio system power is turned on and select correct source position.

Make sure your audio cable is connected without any issues.

SPECIFICATION

Product size	52x52x25mm
Product weight	34 g
LED status	Power on : LED lights blue Power off : No LED light
Input	HDMI
Output	RCA R/L 3.5mm Aux
Audio signal support	LPCM 44 KHz, 48KHz, 96KHz, 192KHz
Power	DC 5V / 0.6A / Micro USB

SAFETY REMINDER

- Indoor use only.
- There are no user serviceable parts. Do not repair the device or open the enclosure.
- Protect the product from extreme temperatures, direct sunlight, strong jolts, high humidity, moisture, flammable gases, vapors and solvents.
- Do not place the product under any mechanical stress
- Use the included DC5V power adapters only. Make sure the specification matches if using 3rd-party DC power adapters.
- Make sure HDMI cables and audio cables are plugged into the correct ports.

NOTICE

- The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.
- DA25 incorporates HDMI® technology.

Thank you for choosing Orei

<https://www.orei.com/>