



18Gbps HDMI over HDBaseT Extender with Bi-directional IR (100M)

USER MANUAL

Follow us on Youtube
and Facebook



www.orei.com

Table of Contents

Introduction.	4
Features.	5
Package Contents.	5
Specifications.	6
Operation Controls and Functions.	9
5.1 Transmitter Panel.	9
5.2 Receiver Panel.	11
5.3 Audio Signal Output Switching.	13
5.4 IR Pin Definition.	13
Application Example.	14

Thank you for purchasing this product

For optimum performance and safety, please read these instructions care-fully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electri-cal components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equip-ment.

Registration page

Please Activate your warranty by registering your product through the link below - www.orei.com/register

Technical Support

Need Help?

Our experienced Technical Support Team is here for you to answer your questions, give technical advice or help troubleshoot your project to get you installed on time and on budget. Call, email or chat with us now.

OREI Live Technical Support Hours

US team (US/Canada/Mexico): Monday-Friday, 9 a.m. - 6 p.m. Central Time **Support Email** - info@orei.com | **Support Number** - 877-290-5530

Or

Chat Live on www.orei.com

Send us an instant message now. Our Technical Support Team will respond momentarily. Available during live support hours.

Scan the QR code to watch a Video of How to Use the product.

Please Activate your Warranty by registering your product through the link below. - www.orei.com/register



Introduction

This 18Gbps HDMI Extender can extend high definition video / audio signal, RS-232, bi-directional IR and internet signal, at the distance of up to 328ft / 100 meters between transmitter and receiver via a single CAT6a/7 cable and support resolution up to 4K2K@60Hz 4:4:4. The transmitter supports ARC function and local audio extract. In addition, the extender is equipped with bi-directional IR pass-through which allows for source and display control. It also supports USB KVM and POC function.

The extender offers the most convenient solution for HDMI extension via a single CAT cable with long distance capability, and is the perfect solution for any application.



1. HDCP 2.2 / HDCP 1.4 and DVI 1.0 compliant
2. Support 18Gbps video bandwidth
3. Video resolution is up to 4k2k@60Hz YUV 4:4:4
4. The maximum transmission distance is 328ft / 100 meters via a single CAT6a/7 cable
5. Support ARC (Audio Return Channel) function
6. With bi-directional IR, RS-232 and CEC pass-through
7. Support USB KVM function
8. HDR, HDR10+, Dolby Vision and HLG function supported
9. Support POC (Power over Cable) function
10. Compact design for easy and flexible installation

Package Contents

1.	18Gbps HDMI over HDBaseT Extender (Transmitter)	1 pcs
2.	18Gbps HDMI over HDBaseT Extender (Receiver)	1 pcs
3.	IR Blaster cable (1.5 meters)	1 pcs
4.	20-60KHz IR Receiver cable (1.5 meters)	1 pcs
5.	Mounting Ear	4 pcs
6.	3-pin Phoenix connector	2pcs
7.	24V/1A Locking Power adapter	1 pcs
8.	User Manual	1 pcs

Specification

Technical	
HDCP Compliance	HDCP 2.2 / HDCP 1.4
Video Bandwidth	18Gbps
Video Resolution	4K2K 50/60Hz 4:4:4 4K2K 50/60Hz 4:2:2 4K2K 50/60Hz 4:2:0 4K2K 30Hz 4:4:4 1080p, 1080i, 720p, 720i, 480p, 480i All PC resolutions including 1920 x 1200
Color Space	RGB / YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0
Color Depth	8/10/12-bit (1080P60Hz, 4K30Hz, 4K60Hz YCbCr 4:2:2/4:2:0) 8-bit (4K60Hz 4:4:4)
HDMI Audio Formats	LPCM 2.0/2.1/5.1/6.1/7.1, Dolby Digital, Dolby TrueHD, Dolby Digital Plus (DD+), DTS-ES, DTS HD Master, DTS HD-HRA, DTS-X
L/R Audio Formats	PCM 2.0
SPDIF Audio Formats	LPCM2.0, Dolby Digital, Dolby Digital Plus, DTS
ESD Protection	Human body model – ±8kV (Air-gap discharge) & ±4kV (Contact discharge)

Specification

Connection	
Transmitter	<p>Inputs: 1x HDMI Type A [19-pin female] Outputs: 1x HDBT OUT [RJ45, 8-pin female] 1x SPDIF OUT [S/PDIF] 1x L/R OUT [3.5mm Stereo Mini-jack] 1x LAN [RG45]</p> <p>Control: 1x IR IN [3.5mm Stereo Mini-jack] 1x IR OUT [3.5mm Stereo Mini-jack] 1x RS-232 [Phoenix jack] 1x SERVICE [Mini-USB, Update port] 1x USB HOST [USB Type B]</p>
Receiver	<p>Inputs: 1x HDBT IN [RJ45, 8-pin female] 1x SPDIF IN [S/PDIF] Outputs: 1x HDMI Type A [19-pin female] 1x LAN [RG45] Control: 1x IR IN [3.5mm Stereo Mini-jack] 1x IR OUT [3.5mm Stereo Mini-jack] 1x RS-232 [Phoenix jack] 1x SERVICE [Mini-USB, Update port] 2x USB 2.0 [USB Type A]</p>
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	Transmitter / Receiver: 165mm [W] x 88mm [D] x 18mm [H]
Weight	Transmitter: 170g, Receiver: 165g
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 24V/1A (Locking connector)
Power Consumption	13W
Operating Temperature	32 - 104°F / 0 - 40°C


Specification

Mechanical	
Storage Temperature	1-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)
Resolution	Distance
4K2K	296ft /90M
1080P	328ft /100M

Resolution / Cable Length	4K60 - Feet / Meters	4K30 - Feet / Meters	1080P60 - Feet / Meters
HDMI IN / OUT	16ft / 5M	32ft / 10M	50ft / 15M
The use of "Premium High-Speed HDMI" cable is highly recommended.			

Operation controls and functions

5.1 Transmitter Panel

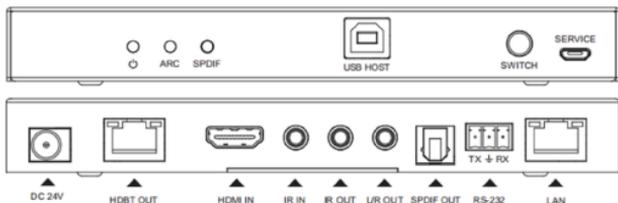


Name	Function/Description
Power LED	Red LED is on when the transmitter is working. LED is off when the transmitter is on standby.
ARC LED	Connect to HDMI display device such as TV or Projector.
SPIDIF LED	Green LED is on when SPDIF OUT port outputs the audio signal returned from SPDIF IN on receiver.
USB HOST	Connect to PC for transmitting receiver's USB data to transmitter.
SWITCH	Press the button to switch the output audio signal source for SPDIF OUT and L/R OUT port.
SERVICE port	Firmware update port.
DC 24V	DC 24V input for 24V 1A power adapter. <i>Note that the extender supports POC function, it means that either transmitter or receiver is connected to 24V/1A power supply, the other doesn't need power supply.</i>
HDBT OUT	RJ45 connector for connecting the HDBT IN port of receiver with CAT 5e/6 cable.

Operation controls and functions

Name	Function/Description
Connection Signal Indicator lamp (on the left side of the HDBT OUT port)	Illuminate: Transmitter and Receiver are in good connection status. Flash: Transmitter and Receiver are in poor connection status. Dark: Transmitter and Receiver are not connected.
Data Signal Indicator lamp (on the right side of the HDBT OUT port)	Illuminate: HDMI signal with HDCP. Flash: HDMI signal without HDCP. Dark: No HDMI signal.
HDMI IN	HDMI source input.
IR IN	IR input port for receiving the signal of IR remote.
IR OUT	IR output port for control of source device. This IR output signal is from IR IN port of receiver.
L/R OUT	3.5mm stereo connector for analog audio output.
SPDIF OUT	SPDIF connector for optical audio output.
RS-232	3-pin Phoenix connector for RS-232 command transmission. The RS-232 command will pass-through from transmitter to receiver or receiver to transmitter.
LAN	RJ45 connector for connecting Hub or router.

Operation controls and functions

5.2 Receiver Panel

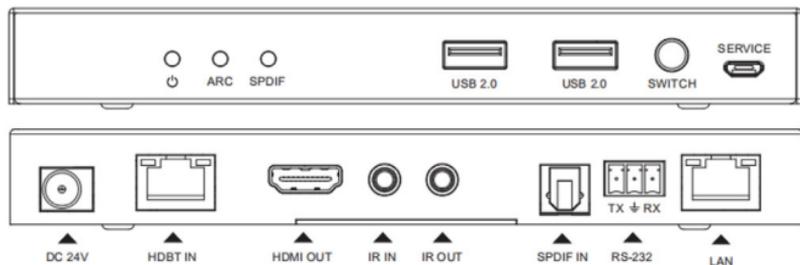

Name	Function/Description
Power LED	Red LED is on when the receiver is working. LED is off when the receiver is on standby.
ARC LED	Green LED is on when ARC function is turned on.
SPIDIF LED	Green LED is on when SPDIF OUT port outputs the audio signal returned from SPDIF IN on receiver.
Two USB 2.0 ports	Connect to USB device.
SWITCH	Press the button to switch the output audio signal source for SPDIF OUT and L/R OUT port.
SERVICE port	Firmware update port.
DC 24V	DC 24V input for 24V 1A power adapter. <i>Note that the extender supports POC function, it means that either transmitter or receiver is connected to 24V/1A power supply, the other doesn't need power supply.</i>
HDBT IN	RJ45 connector for connecting the HDBT OUT port of transmitter with CAT 5e/6 cable.

Operation controls and functions

Name	Function/Description
Connection Signal Indicator lamp (on the left side of the HDBT IN port)	Illuminate: Transmitter and Receiver are in good connection status. Flash: Transmitter and Receiver are in poor connection status. Dark: Transmitter and Receiver are not connected.
Data Signal Indicator lamp (on the right side of the HDBT IN port)	Illuminate: HDMI signal with HDCP. Flash: HDMI signal without HDCP. Dark: No HDMI signal.
HDMI OUT	HDMI output for display.
IR IN	IR input port for receiving the signal of IR remote.
IR OUT	IR output port for control of display device. This IR output signal is from IR IN port of transmitter.
SPDIF IN	SPDIF connector for optical audio input.
RS-232	3-pin Phoenix connector for RS-232 command transmission. The RS-232 command will pass-through from transmitter to receiver or receiver to transmitter.
LAN	Connect to Internet device such as PC or laptop.

Operation controls and functions


5.3 Audio Signal Output Switching

Switch the output audio signal source for SPDIF OUT and L/R OUT port via the "SWITCH" button on the panel (the corresponding LED will illuminate). The states of ARC LED and SPDIF LED indicate the audio output logic, as shown in the table below:

ARC LED State	SPDIF LED State	Audio Output Logic
On	Off	The SPDIF OUT, L/R OUT and HDMI IN ports of the Transmitter simultaneously output the audio signal returned from HDMI (display device) on Receiver.
On	On	The SPDIF OUT and L/R OUT ports output the audio signal returned from HDMI (display device) on Receiver.
Off	On	The SPDIF OUT and L/R OUT ports output the audio signal returned from SPDIF IN on Receiver.
Off	Off	The SPDIF OUT and L/R OUT ports output the audio signal extracted from the Transmitter.

5.4 IR Pin Definition

IR Receiver and Blaster pin's definition as below:

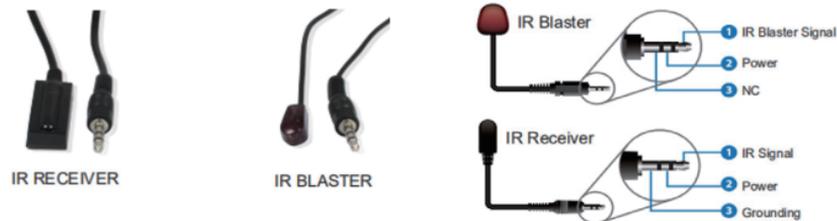

Note that IR remote sends signal at the distance of 0-5 meters / 0-8 meters with the angle of $\pm 45^\circ$ in vertical direction.


Application Example

RECEIVER UNIT




Application Example

TRANSMITTER UNIT

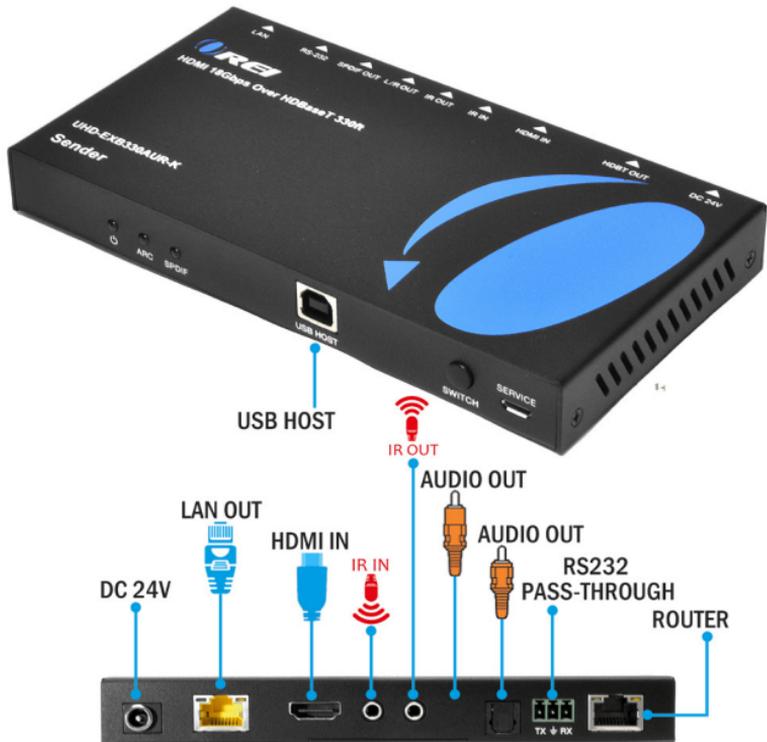

Application Example

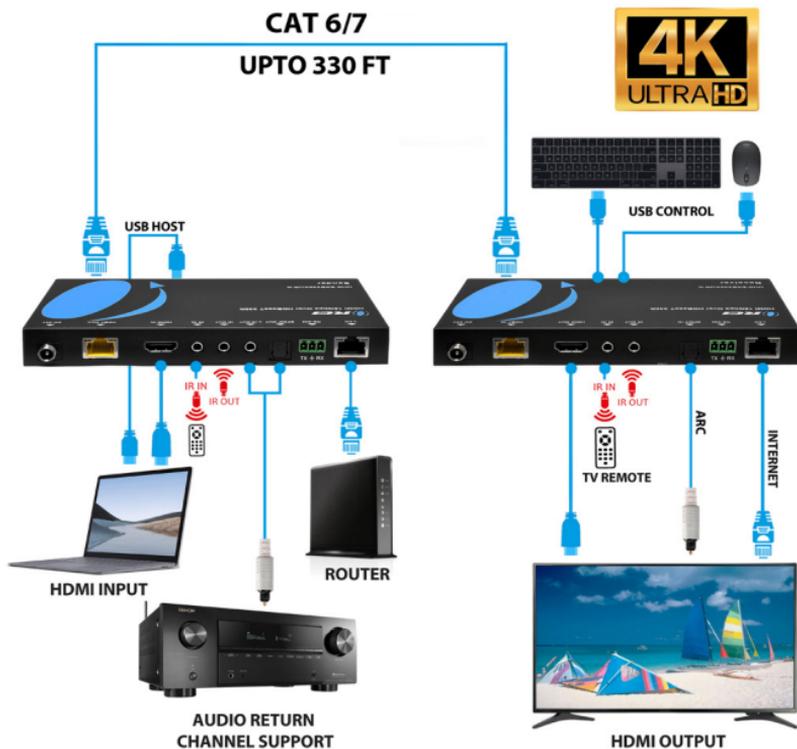





**18Gbps HDMI over HDBaseT
Extender with Bi-directional
IR (100M)**

www.orei.com

© 2020